



AlphaSports™

Summit 180




Standard Features

Directional Front & Rear Tires

Automatic CVT Transmission

Convenient Kick & Electric Start

Front & Rear Utility Racks

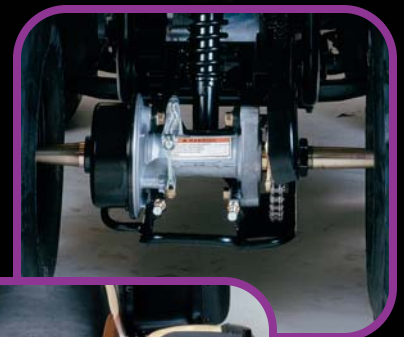

www.AlphaSportsMotors.com

Summit 180

Specifications

Engine Type	4-Stroke, Horizontal
Cylinder Number	1
Displacement	170 cc
Cooling	Forced Air & Oil Cooled
Bore Stroke	61.0 x 57.8 mm
Compression Ratio	9.4:1
Max Torque	9.15 Nm/6250 rpm
Carburetor	Walboro WVF
Starting	Electric w/Kick Start Backup
Lubrication	Pressure
Lubrication Capacity	1.0 qt.
Transmission	Automatic (C.V.T System) w/ Reverse Gear
Suspension (Front)	Single Wishbone
Suspension (Rear)	Swing Arm, Single Shock
Brake (Front)	Drum
Brake (Rear)	Drum
Parking	Mechanical Lock
Tire (Front)	21x7-10
Tire (Rear)	22x10-8
Tire Pressure (Front)	5 psi
Tire Pressure (Back)	3 psi
Overall Dimension	71.7 x 38.4 x 41.7 in.
Wheelbase	41.3 in.
Seat Height	33.5 in.
Ground Clearance	6.3 in.
Dry Weight	348.3 lb.
Max Load	319.0 lb.
Front Rack Max Load	33.0 lb.
Rear Rack Max Load	66.0 lb.
Fuel	Unleaded Gasoline
Fuel Capability	2.1 gal.
Brake Light	Standard
Headlights	Two, 35-watt

Standard Features

- 170 cc horizontal, environmentally-friendly, four-stroke engine
- Automatic CVT transmission
- Convenient kick & electric start
- 2.1 gallon fuel tank
- Rear adjustable suspension with 3 settings
- Two headlights and one taillight
- Brake light
- Audible horn
- Maxxis® Maverick directional tires
- Front and rear utility racks
- On-board tool box
- 6-month warranty
- Ages 16 and older



AlphaSports™ • 3123 Washington Rd. • Augusta, GA 30907 • 1-877-543-7288

WARNING: This vehicle is sold for off-road use only. Before operating this vehicle, read all the instructions for safe assembly and operation as well as the instruction governing the engine and other operational guidelines of the vehicle.

www.AlphaSportsMotors.com

